

# Golden Nugget – Tubular Towers

## Features

- Precision swaged legs for perfect fit
- “Everdur” welded for high strength
- Sleeve bearing for masts up to 1.66” (4.2 cm) diameter
- Legs and braces “Galvanized” steel
- Rotor plate for longer rotor life
- Designed to withstand impact load of a climber in case of a fall in accordance with CSA-S37-13. See installation instructions for more information.
- Each section subjected to pressure testing to ensure all weld points pass the minimum strength requirements. The result is a safe and reliable tower - look for dimple on braces.

## Load Limits

Designed to support equipment up to 3 square ft. (0.28 m<sup>2</sup>) projected wind area, mounted not more than 2 sections above house bracket.

**Caution: Guy wires must be used for larger loads or greater heights above house bracket. However, the towers have not been tested to CSA standards CSA-S16 and CSA-S37-13 for loading larger than what is indicated above.**



## Sections

<b>GN18T</b>	18 gauge top section	9’6” (2.90 m).
<b>GN18S</b>	18 gauge straight section	10’0” (3.05 m).
<b>GN16T</b>	16 gauge top section	9’6” (2.90 m).
<b>GN16S</b>	16 gauge straight section	10’0” (3.05 m).

**Note:** All sections complete with necessary nuts and bolts. Top sections include top bearing set screw and lower mast clamp assembly.

## Accessories

<b>GNHB</b>	Universal house bracket 1” O.D. (2.54 cm) x 3’ (0.91 m) arms.
<b>GNUHB</b>	Economical “U” house bracket.
<b>GNBP</b>	16 gauge base plate.
<b>DMBS</b>	Galvanized steel drive stakes. Set of three. 1 ¼” (3.2 cm) x 3’ (0.91 m).
<b>GN3HU</b>	3’ hinge-up base.
<b>CS-GN</b>	Climb Shield for GN Tower.
<b>GS-GN</b>	Guy Station for GN Tower.

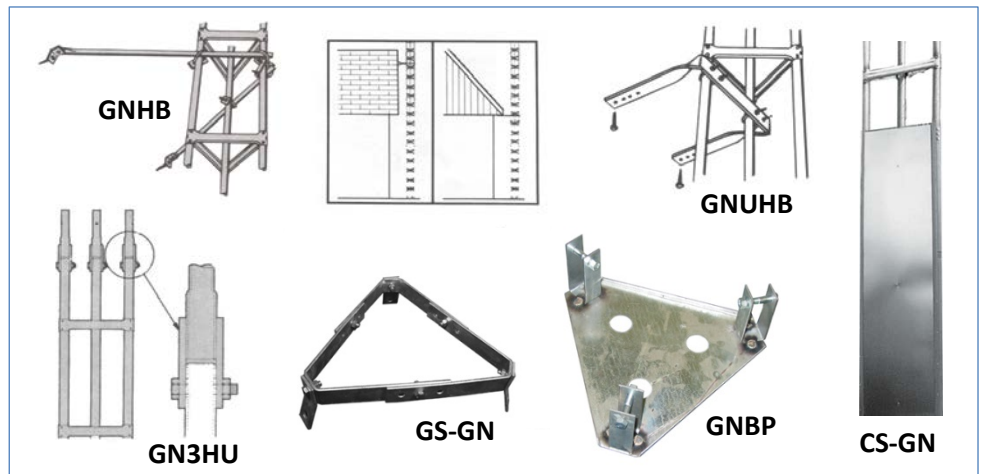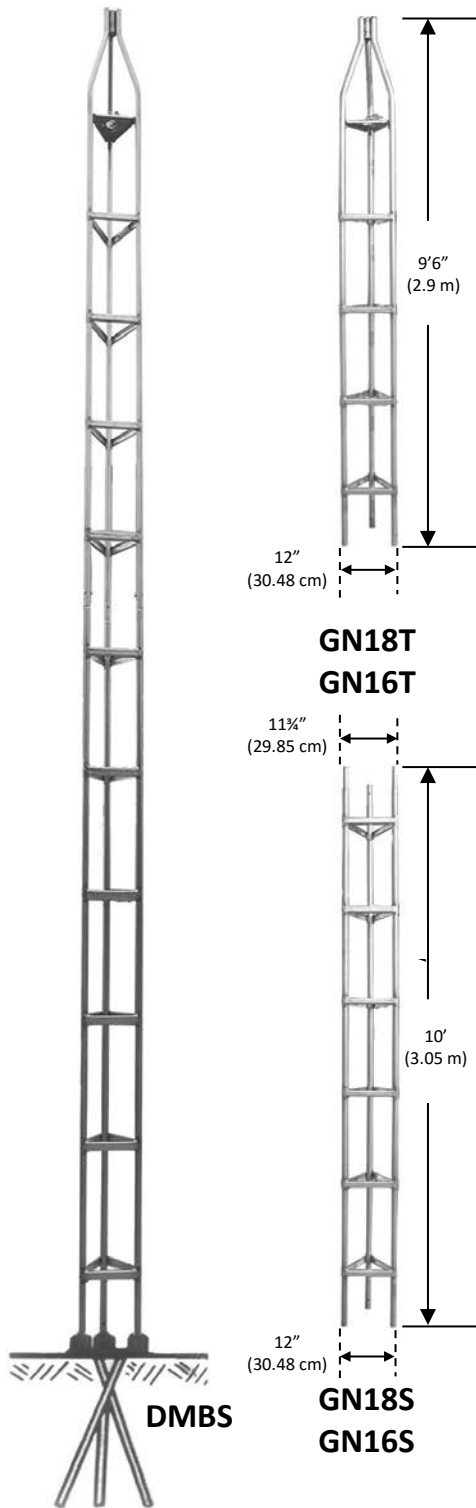

WADE ANTENNA’S ONGOING POLICY OF CONTINUING DEVELOPMENT MAY RESULT IN SPECIFICATION CHANGES TO ITS PRODUCTS