


Tripod Roof Mounts



TRM-10L

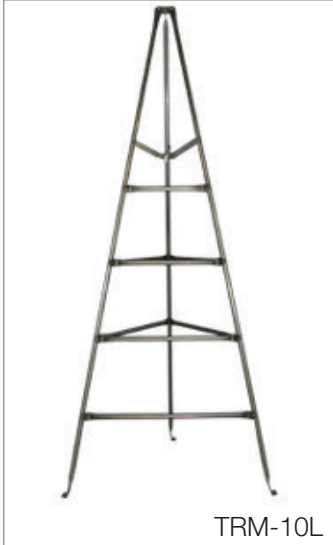

TRM-5N



TRM-3PN



TR2-5

FEATURES

- Quick and easy on-site installation
- Made with 1¼" (3.2 cm) galvanized welded steel tubing
- Corrosion preventing interior/exterior galvanized steel coating
- Heavy-duty construction
- Accept up to 1¼ (4.4 cm) mast
- Swing away mast support
- TRM-3PN boxed for easy storage
- Roof sealing Lag Screws available
- TRM-3 & 5 wind load test results available

SPECIFICATIONS

MODEL	SHIPPING DIMS in (mm)	WEIGHT lbs (kg)	COLLAR HEIGHT feet (mm)	LEG DISTANCE in (mm)	MAST OD in (mm)
TRM-3PN	60 x 7 x 6 (915 x 178 x 153)	8 (3.6)	3 (915)	32 (813)	1¾ (44)
TRM-5N	60 x 7 x 6 (1524 x 178 x 153)	13 (5.9)	5 (1524)	44 (1118)	1¾ (44)
TRM-10L	120 x 12 x 11 (3048 x 178 x 153)	50 (22.7)	10 (3048)	78 (1918)	1¾ (44)
TR2-5 BIPOD	60 x 7 x 6 (1524 x 178 x 153)	7 (3.2)	N/A	N/A	1¼/18ga/60 incl.

Wade Antenna's ongoing policy of continuing development may result in specification changes to its products.

WADE Antenna, Inc.

29 Sharp Road, Brantford, Ontario, N3T 5L8 Canada

Tel: 519.756.7157 Fax: 519.756.5056

1.800.463.1607

sales@wadeantenna.com

www.wadeantenna.com

SPEC0042_A01