



## CLIMB SHIELD INSTRUCTION SHEET

For Models CS-3 through CS-8

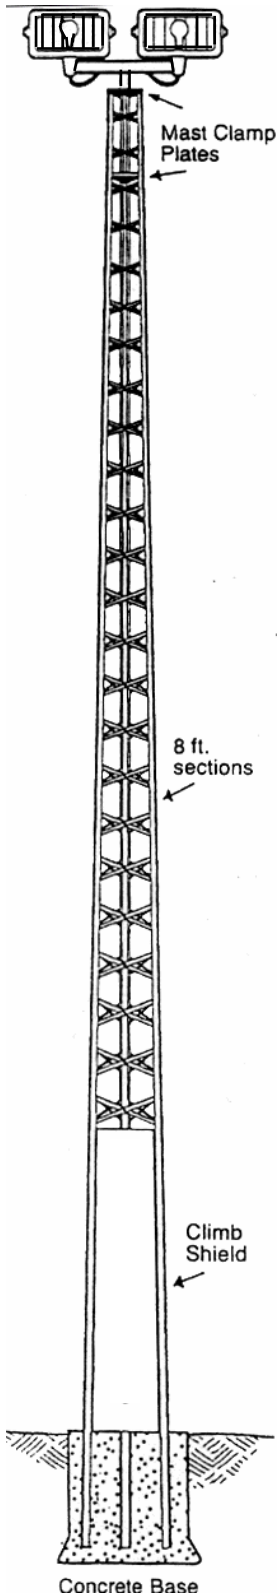

**Uses:** Last number designation on climb shield corresponds to tower section it will be installed on. e.g. CS-5 on a DMX-5 or LTX-5 tower section.

Climb Shields are manufactured from 24 gauge galvanized steel and are 8 feet high. It is suggested that they be attached with #10 x 3/4" self tapping sheet metal screws for ease of removal if necessary. Climb shields can also be used to enclose ballasts.

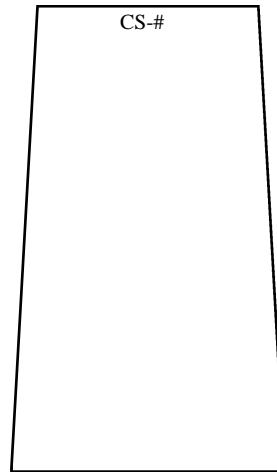

Climb Shield Design

**Instructions:** Separate climb shields. Place climb shield under one upright leg of tower . Slide sideways to center, under both legs. Use #10 x 3/4" self tapping sheet metal screws to attach climb shield to cross braces. A 1/8 inch pilot hole is recommended for ease of installation.